

December 1967


Brief 67-10559

NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Solid State Zero-Bias Bilateral Switch

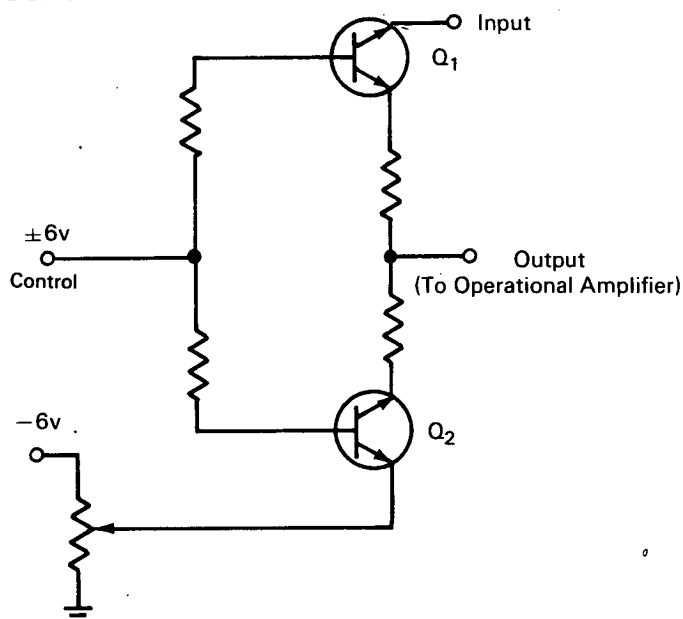

This circuit was designed to switch a ± 2.5 volt peak, dc to 300 kHz input to an operational amplifier as controlled by a +6 (on) or -6v (off) signal.

The novel feature of this circuit is the use of the bilateral transistor Q_2 which draws a saturation current of equal amplitude and opposite polarity to the saturation current of the bilateral transistor Q_1 . As a result, the dc bias effect is canceled at the output (input summing point of the operational amplifier). Since Q_2 is switched on whenever Q_1 is on, and off when Q_1 is off, the operational amplifier has a true zero dc bias in both signal off and signal on conditions.

Notes:

1. This switch should be useful in a wide variety of signal switching and control circuits.

2. Inquiries concerning this switch may be directed to:

Technology Utilization Officer
Goddard Space Flight Center
Greenbelt, Maryland 20771
Reference: B67-10559

Patent status:

No patent action is contemplated by NASA.

Source: J. M. Husted
of Radio Corporation of America
under contract to
Goddard Space Flight Center
(GSFC-532)

Category 01

IS-SAF
RM. 1427
1

KSC HQS.